



## **FD7132** Fixed Dome Network Camera ***Day & Night · Indoor · 3-axis · PoE · PIR***



FD7132, aimed to provide 24-hour surveillance for indoor applications, features true day and night function with a removable IR-cut filter and IR illuminators. Boasting a 3-axis mechanism, FD7132 can be flexibly installed in places such as banks, office buildings and commercial complex. Under day light, the IR-cut filter is activated to minimize the influence of infrared light on image color. In the low-light condition, the IR-cut filter is removed automatically and the built-in IR illuminators are enabled to offer infrared light for up to 15 meters (50ft). Therefore, FD7132 can provide high sensitivity and delivery high image quality in both day and night conditions. In addition, FD7132 can be easily installed on the ceiling or against the wall because of its sophisticated 3-axis hinge mechanism. In order to prevent occurrences of false alarms, a PIR (Passive Infrared) sensor is built in to detect motion objects by their thermal. FD7132 provides many other advanced functions, including simultaneous dual streams, 3GPP mobile surveillance, 802.3af compliant PoE, two-way audio by SIP protocol, and HTTPS encryption. With the full-featured FD7132, you can easily build up a cost-effective IP surveillance system for indoor applications such as offices, banks, and retail stores.

### **Features**

---

- 3-axis Mechanical Design for Ceiling/Wall Mount Installation
- 3.3~12mm Vari-focal Board Lens with Auto-Iris
- Built-in IR Illuminators for up to 15 Meters
- Removable IR-cut Filter for Day & Night Function
- Built-in PIR Sensor for Human Detection
- Real-time MPEG-4 and MJPEG Compression (Dual Codec)
- Supports Dual Streams Simultaneously
- 3GPP Mobile Surveillance
- Built-in 802.3af Compliant PoE (Power over Ethernet)
- Two-way Audio by SIP Protocol
- Digital I/O for External Sensor and Alarm
- HTTPS Encrypted Data Transmission

## System Overview

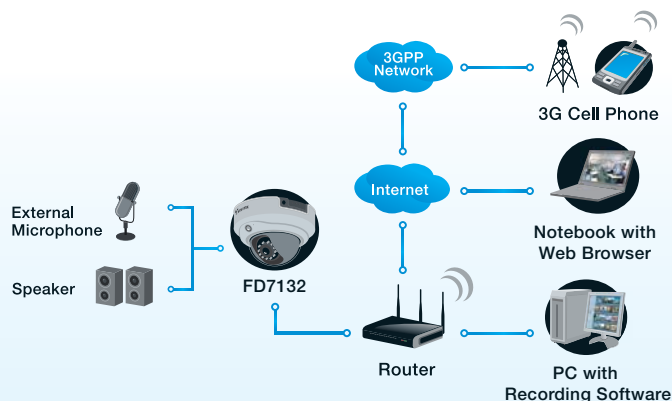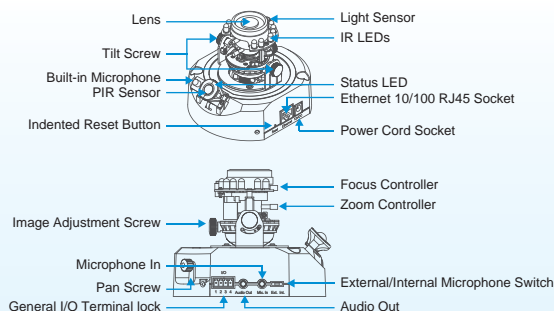

## Specifications

### System

- CPU: VVTK-1000 SoC
- Flash: 8MB
- RAM: 64MB
- Embedded OS: Linux 2.4

### Lens

- Board lens, vari-focal,  $f=3.3\text{ mm}\sim 12\text{ mm}$ , F1.4 (wide), F2.9 (tele), auto-iris, focus range: 50 cm to infinity
- Removable IR-cut filter for day & night function

### Angle of view

- $17.9^\circ \sim 63.6^\circ$  (horizontal)
- $13.5^\circ \sim 46.5^\circ$  (vertical)

### Shutter Time

- 1/5 sec. to 1/15000 sec.

### Image Sensor

- MICRON 1/4" CMOS sensor in VGA resolution

### Minimum Illumination

- 0.56 Lux/F1.4

### Video

- Compression: MJPEG & MPEG-4
- Streaming:
  - Simultaneous dual-stream
  - MPEG-4 streaming over UDP, TCP, or HTTP
  - MPEG-4 multicast streaming
  - MJPEG streaming over HTTP
- Supports 3GPP mobile surveillance
- Frame rates:
  - MPEG-4: Up to 30/25 fps at 640x480
  - MJPEG: Up to 30/25 fps at 640x480

### Image settings

- Adjustable image size, quality, and bit rate
- Time stamp and text caption overlay
- Flip & mirror
- Configurable brightness, contrast, saturation, sharpness, and white balance
- AGC, AWB, AES
- Automatic or manual day/night mode
- Supports privacy masks

### Audio

- Compression:
  - GSM-AMR speech encoding, bit rate: 4.75 kbps to 12.2 kbps
  - MPEG-4 AAC audio encoding, bit rate: 16 kbps to 128 kbps
- Interface:
  - Built-in microphone
  - External microphone input
  - Audio output
- Supports two-way audio by SIP protocol
- Supports audio mute

### Networking

- 10/100 Mbps Ethernet, RJ-45
- Protocols: IPv4, TCP/IP, HTTP, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, and HTTPS

### Alarm and Event Management

- Triple-window video motion detection
- One D/I and one D/O for external sensor and alarm
- Passive infrared sensor (PIR) for human detection
- IR illuminators up to 15 meters
- Event notification using HTTP, SMTP, or FTP
- Local recording of MP4 file

### Security

- Multi-level user access with password protection
- IP address filtering
- HTTPS encrypted data transmission

### Users

- Camera live viewing for up to 10 clients

### Dimension

- 143 mm (D) x 106 mm (H)

### Weight

- Net: 619 g

### LED Indicator

- System power and status indicator
- System activity and network link indicator

### Power

- 12V DC
- Power consumption: Max 11 W
- 802.3af compliant Power over Ethernet

### Approvals

- CE, LVD, FCC, VCCI, C-Tick

### Operating Environments

- Temperature:  $0^\circ \sim 50^\circ\text{C}$  ( $32^\circ \sim 122^\circ\text{F}$ )
- Humidity: 20 % ~ 80 % RH

### Viewing System Requirements

- OS: Microsoft Windows 2000/XP/Vista
- Browser: Internet Explorer 6.x or above
- Cell phone: 3GPP player
- Real Player: 10.5 or above
- Quick Time: 6.5 or above

### Installation, Management, and Maintenance

- 3-axis mechanism for flexible ceiling and wall mount installation
- Installation Wizard 2
- 16-CH recording software
- Supports firmware upgrade

### Applications

- SDK available for application development and system integration

All specifications are subject to change without notice. Copyright ©2008 VIVOTEK INC. All rights reserved. P/N: 011001400 Ver 2.1