

● NR8201/8301 vs NR7401

NR8201/8301	NR7401
Real-time H.264, MPEG-4, and MJPEG Compression (Triple Codec)	-- (H.264 not supported)
Simultaneous Viewing & Recording	√
Built-in 802.3af Compliant PoE	√
Camera Installation through Easily Plug and Play	√
External USB Interface for Video Backup	√
LED Indicator for Quick Status Display	√
Integrated Firewall Protects System from Network Attacks and Unauthorized Access	√
Built-in Gateway for Separating the Networks from the Network Cameras and Data Transmitting	√
IP Address Filtering	√
PTZ & ePTZ Camera Control	-- (ePTZ not supported)
Removable & Lockable HDD Design	--
Compatible with VIVOTEK VAST Central Management Software	--
Professional Rack Mount Design	--
External eSATA Interface (NR8201)	--
Support RAID 0, 1 Scalable Storage Solution (NR8301)	--
Power Timer for Power Safety	--
Support All Series of VIVOTEK Products	--
Convenient Video Settings of Resolution, Quality and Frame Rate	--
Gigabit Ethernet Port for Higher Transmitting Rate	--
Multiple Streams	--

● Technical Specifications

System	Alarm and Event Management
<ul style="list-style-type: none">· CPU: Marvell 88F6281 1.2G· Flash: 128MB· RAM: DDR-SRAM 512MB· Embedded OS: Linux	<ul style="list-style-type: none">· Four D/I and one D/O for external sensor and alarm· Event notification using SMTP
Channels	Security
<ul style="list-style-type: none">· NR8201: Support up to 4 channels· NR8301: Support up to 8 channels	<ul style="list-style-type: none">· Multi-level user access with password protection· IP address filtering
Hard Disk	Users
<ul style="list-style-type: none">· NR8201: Support 1 x 3.5" SATA I/II HDD, up to 2TB (Support external eSATA interface)· NR8301: Support 2 x 3.5" SATA I/II HDD, up to 4TB (Support RAID 0, 1 scalable storage)	<ul style="list-style-type: none">· Camera live and playback viewing for up to 10 clients
Compatibility	Dimension
<ul style="list-style-type: none">· Support VIVOTEK all series of network cameras	<ul style="list-style-type: none">· 446.4 mm (W) x 330.2 mm (D) x 43.6 mm (H)
Codec	Weight
<ul style="list-style-type: none">· Video compression: H.264/MJPEG/MPEG-4· Audio compression: AAC/GAMR/G.711	<ul style="list-style-type: none">· NR8201: 4kg· NR8301: 4.7kg
Recording Throughput	LED Indicator
<ul style="list-style-type: none">· Total 50Mbps NR8201: 4 x 30fps @ 1080P NR8301: 8 x 30fps @ 1280x800	<ul style="list-style-type: none">· System power, PoE, status and hard disk indicators· Network link indicator
Recording Policy	Power
<ul style="list-style-type: none">· Alarm recording· Scheduled recording· Continuous recording· Manual recording	<ul style="list-style-type: none">· 100 ~ 240V AC· 802.3af compliant Power-over-Ethernet· Power consumption: NR8201: Max. 0.48 W (without PoE camera); Max. 60 W (with 4 PoE cameras) NR8301: Max. 0.96 W (without PoE camera); Max. 120 W (with 8 PoE cameras)
Connectors	Approvals
<ul style="list-style-type: none">· 1 x Gigabit, RJ45 (1 WAN port)· NR8201: 4 x Ethernet 10/100 BaseT, RJ45 (4 LAN ports)· NR8301: 8 x Ethernet 10/100 BaseT, RJ45 (8 LAN ports)· USB socket for backup· Terminal block: 4 digital input, 1 relay output, and 1 power output with 12V Max. 1A	<ul style="list-style-type: none">· CE, FCC, VCCI, C-Tick, CB
Camera Management	Operating Environments
<ul style="list-style-type: none">· Auto or manual installation for VIVOTEK cameras· Video and network configuration through NR8301	<ul style="list-style-type: none">· Temperature: 0 ~ 50 °C (32 ~ 122 °F)· Humidity: 20% ~ 80% RH
Pan/Tilt/Zoom Control	Viewing System Requirements
<ul style="list-style-type: none">· Pan/tilt/zoom control of VIVOTEK cameras	<ul style="list-style-type: none">· OS: Microsoft Windows 2000/XP/Vista/Win7· Browser: Internet Explorer 6 or above· 3GPP access
History Playback	Installation, Management and Maintenance
<ul style="list-style-type: none">· Playback of recorded media with time navigations	<ul style="list-style-type: none">· VAST central management software· Installation Wizard 2· Support firmware upgrade· Support VIVOTEK joystick
Networking	Warranty
<ul style="list-style-type: none">· Protocols: IPv4, TCP/IP, HTTP, RTSP/RTP/RTCP, IGMP, SMTP,FTP, DHCP, NTP, DNS, DDNS, 3GPP	<ul style="list-style-type: none">· 24 months

All specifications are subject to change without notice. Copyright©2011 VIVOTEK INC. All rights reserved.



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.
| T: +886-2-82455282 | F: +886-2-82455532 | E: sales@vivotek.com

VIVOTEK USA, INC.
470 Lakeside Drive Suite C, Sunnyvale, CA 94085 USA
| T: 408-773-8686 | F: 408-773-8298 | E: salesusa@vivotek.com

Ver 1.0

Network Video Recorder NR8201/8301

H.264 • Compatible with VAST CMS • Lockable HDD & Rack Mount Design



VIVOTEK's NR8201/8301 network video recorder offers an elegant recording solution for VIVOTEK network cameras and performs real-time monitoring and recording simultaneously. It supports up to 4-CH (NR8201) and 8-CH (NR8301) H.264, MJPEG, and MPEG-4 video and provides multiple recording modes including alarm recording, scheduled recording, manual recording and continuous recording. The installation is very simple as the camera is able to be inserted automatically when it's plugged in. It also offers a user-friendly interface for the user to configure the network settings and the camera control. Moreover, the 802.3af compliant PoE (Power-over-Ethernet) is able to reduce the complex of the installation, making NR8201/8301 the cost-effective recording systems.

The user can utilize the NR8201/8301 to record high-definition mega-pixel videos on removable hard disk(s) with large capacity and a USB interface for data backup. The NR8201 also supports an external hard disk from the eSATA interface, and the NR8301 supports RAID 0 and 1 storage solution. The built-in gateway separates the network camera connection and the data network connection for the prevention of network congestion. Functional four digital inputs and one digital output interfaces are capable of integrating with the security sensors and alarms. The NR8201/8301 are comprehensive network video recorders featuring with multiple functions to provide the best quality and highest performance in network video recording.



Features

NR8201/8301




- Real-time H.264, MPEG-4, and MJPEG Compression (Triple Codec)
- Simultaneous 4-CH (NR8201) and 8-CH (NR8301) Video Viewing & Recording
- Removable & Lockable HDD Design
- Compatible with VIVOTEK VAST Central Management Software*
- Built-in 802.3af Compliant PoE
- Camera Installation through Easily Plug and Play
- Professional Rack Mount Design
- External eSATA Interface for the Expansion of Video Recording (NR8201)
- Support RAID 0, 1 Scalable Storage Solution (NR8301)
- External USB Interface for Video Backup
- LED Indicator for Quick Status Display
- Integrated Firewall Protects System from Network Attacks and Unauthorized Access
- Built-in Gateway for Separating the Networks from the Network Cameras and Data Transmitting
- Support E-mail Alert Notification
- Power Timer for Power Safety
- Support All Series of VIVOTEK Cameras


*The VIVOTEK VAST Central Management Software is not included in the package.

Physical Description


NR8201

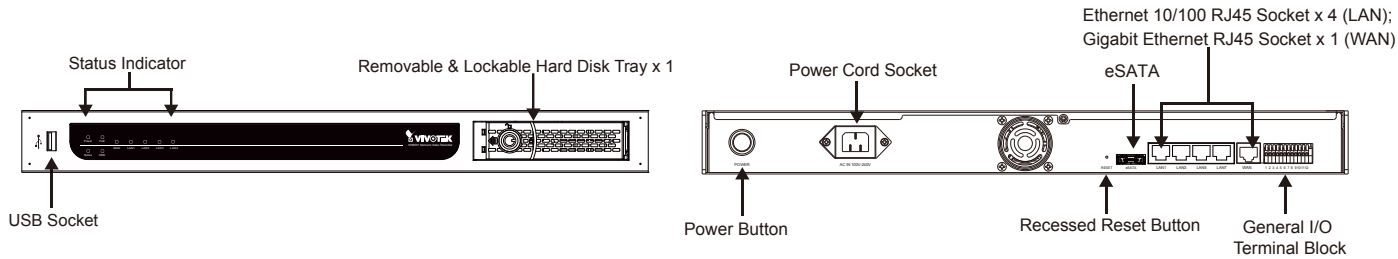

NR8301

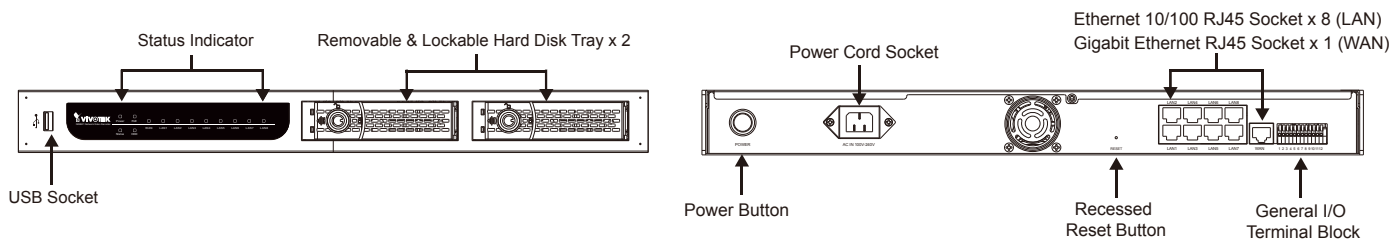

Removable & Lockable HDD Design

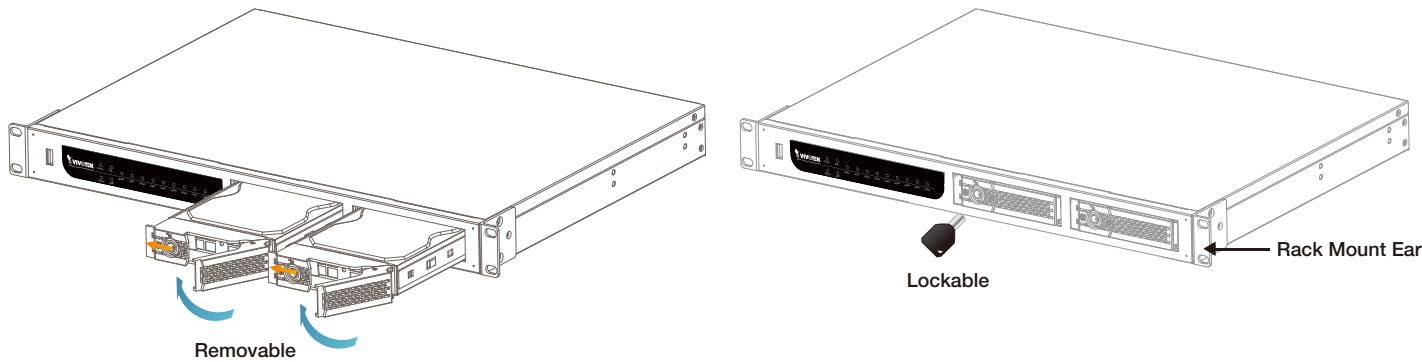

Compatible with VAST Central Management Software


The powerful integrated NR8201/8301 are compatible with the highly scalable central management software VAST providing live view, playback, and PTZ control for a large-scale application.



Applications




Entry-level Installation

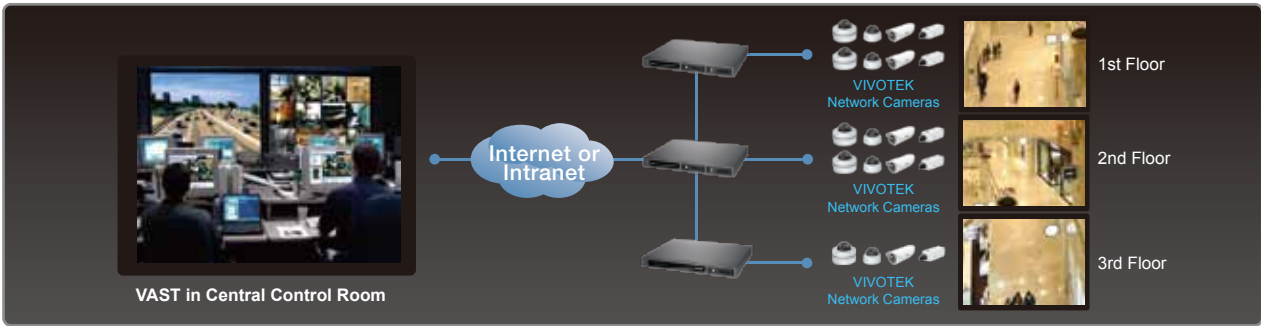

Multiple-site Structure for Medium to Large-scale Systems

VIVOTEK VAST can manage VIVOTEK NR8201/8301 as sub-stations, and also remotely monitor live image and playback media data of cameras managed by NVR. The NR8201/8301 can also serve as LAN/WAN gateway, internet router and PoE switch, which provides an all-in-one solution to reduce the purchasing, installation and maintenance cost.

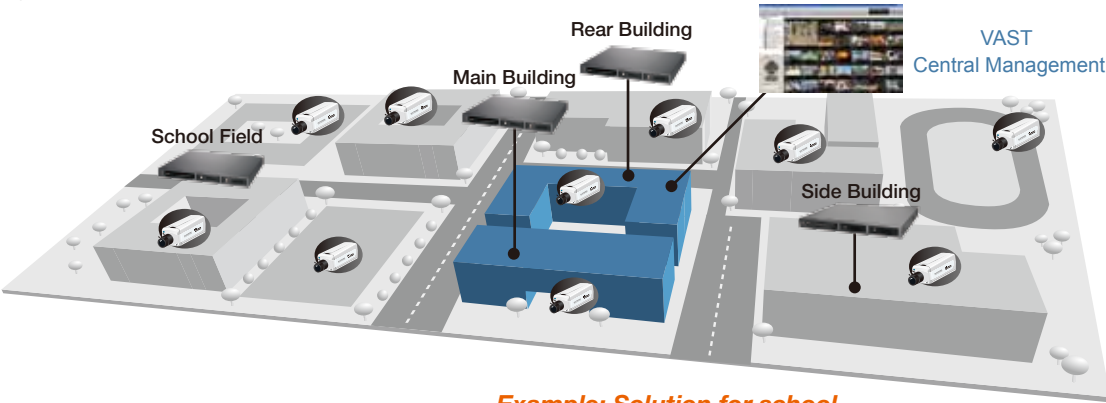

Example: Solution for school