


HatGLAND cable glands, metric, stainless steel 1.4305



Protection class to EN 60 529: IP 68 to 5 bar (30min)
Protection class to DIN 40 050-T9: IP 69K
Temperature range: -40°C to 120°C, interm. up to approx. 140°C
Material: - Cable gland: stainless steel A2 (1.4305/AISI 303)
 - Gasket: EPDM
Equipment: - Gland according to Hygienic Design
 - EMC-version on request
 - Cable range can be achieved by enclosed gasket selection
 - Additional sealing materials on request
 - Tamperproof
 - For assembly long hole
 -Pack = incl. sealing rings, locknuts

HatGLAND Kabelverschraubungen, metrisch, Edelstahl 1.4305

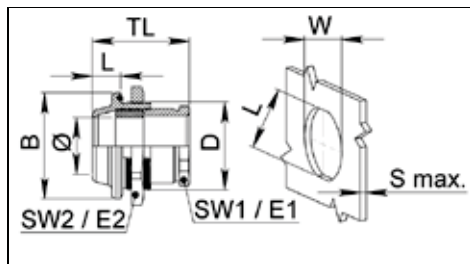

Schutzart gemäß EN 60 529: IP 68 bis 5 bar (30min)
Schutzart gemäß DIN 40 050-T9: IP 69K
Einsatztemperatur: -40 bis 120°C, kurzzeitig bis ca. 140°C
Material: - Verschraubung: Edelstahl A2 (1.4305/AISI 303)
 - Dichtung: EPDM
Ausstattung: - Verschraubung entsprechend Hygienic Design
 - Ausführung für geschirmte Leitungen auf Anfrage
 - Der angegebene Klemmbereich wird durch das enthaltene Dichtungssortiment erreicht
 - Weitere Dichtungsmaterialien auf Anfrage.
 - Manipulationssicher
 - Für Montagelangloch
 -Pack = inkl. Dichtringe, Gegenmuttern

Type	WISKA-No.						TL	L x W x S (max) [mm]	B x L [mm]
			mm	mm	mm	mm	mm		
HGSM 12-E Pack	10101853	1	M 12x0,75	2 · 5	9	15	15,5 · 20,5	10,5 x 12 x 4	17 x 6
HGSM 16-E Pack	10101854	1	M 16x0,75	2 · 9	12	19	17,5 · 24,5	14,5 x 16 x 5	21 x 7
HGSM 20-E Pack	10101855	1	M 20x0,75	3 · 12	17	24	19,5 · 27,5	18,5 x 20 x 5,5	25 x 8
HGSM 25-E Pack	10101856	1	M 25x0,75	4 · 16	21	30	19,5 · 27,5	23 x 25 x 5,5	30 x 8
HGSM 32-E Pack	10101857	1	M 32x0,75	9 · 23	28	36	27,5 · 39,5	30 x 32 x 10	38 x 11
HGSM 40-E Pack	10101858	1	M 40x1,5	16 · 29	35	46	33,0 · 47,0	37 x 40 x 10	46 x 14
HGSM 50-E Pack	10101859	1	M 50x1,5	26 · 38	45	60	37,0 · 53,0	47 x 50 x 10	56 x 16
HGSM 63-E Pack	10101860	1	M 63x1,5	32 · 49	56	70	42,0 · 60,0	59 x 63 x 10	70 x 18