

ST Optical Fibre Adaptors

V.3.1

Description

FibreFab ST adaptors have high precision alignment sleeves for reliability and better reconnectability. ST adaptors come with a ceramic sleeve for the singlemode and phosphor bronze sleeve for the multimode. The housing is available in single D or double D types.

Features


- ▶ Complies with IEC 61754-20
- ▶ High precision alignment sleeve
- ▶ Low insertion loss and high reconnectability
- ▶ RoHS, REACH SvHC compliant
- ▶ Available in simplex only

Applications

- ▶ Data processing networks
- ▶ Premises distribution

Technical Specification

| OPTICAL PERFORMANCE | CERAMIC | PHOSPHOR BRONZE | CONFORMANCE |
|----------------------------|-----------------------|-----------------|----------------|
| Insertion Loss (Typ) | 0.1 dB | 0.15 dB | IEC 61300-3-4 |
| Mating Durability | 500 | | IEC 61300-2-2 |
| Receptacle Retention force | 1N - 2.5N | | IEC 61754-20 |
| Operating temperature | -25 to +70, 12 cycles | | IEC 61300-2-22 |

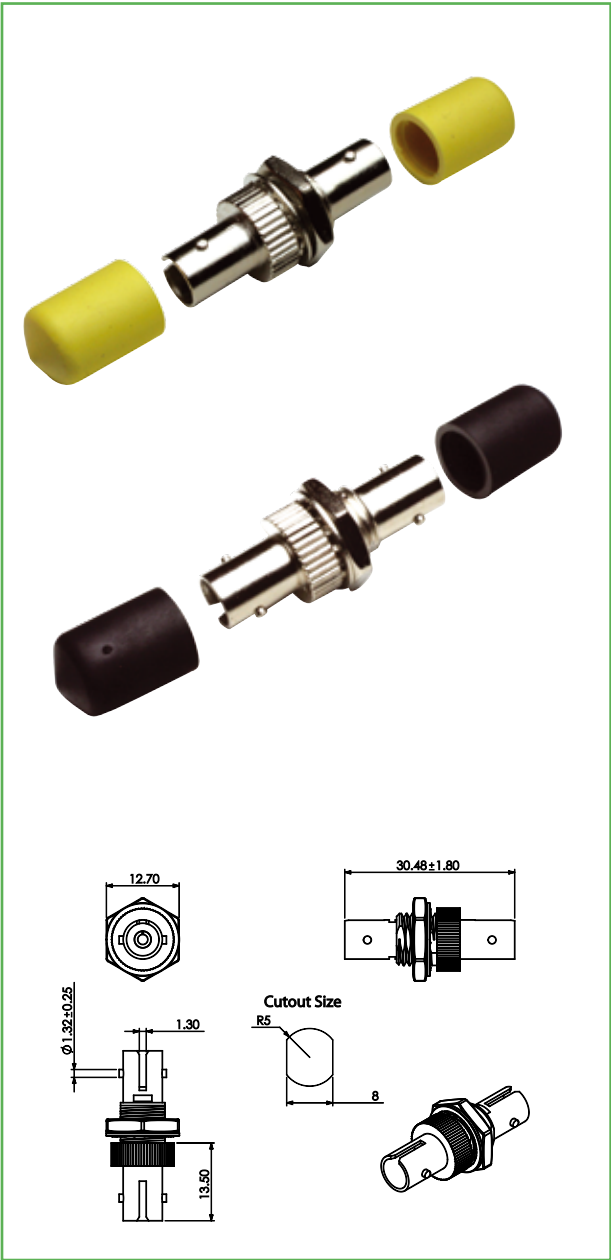

Ordering Information

| MODE | TYPE | PART NO. |
|------|------|----------|
| SM | PC | STUZR02 |
| MM | PC | STUPHBR |



+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com