

Fibre Optic Inline Enclosure

V.3.1

Description


The inline enclosure is suitable for protecting fibre cable splices in straight through and branching applications. Its well-engineered, injection moulded outer body makes it impenetrable to the elements. It can protect splices and ensure reliability with usage in ambient temperatures from -40°C to +65 °C. It can be placed in aerial, underground, wall mounted, or duct mounted locations.

Features

- ▶ Holds 24 to 192 splice's
- ▶ Easy to re-enter
- ▶ 3 cable entry position at each end
- ▶ Termination and splice kit included
- ▶ Integrated seal, airtight and waterproof
- ▶ Ideal for cable repair
- ▶ RoHS compliant
- ▶ Can be used in through, branch or mid span splice locations
- ▶ Suitable for aerial, underground duct or direct burial applications.
- ▶ IP 68 up to 1.5 m water depth

Technical Specification

Specification: (Height will vary as splice count increases)				
24 to 71 Splice enclosure:	Width: 210 mm	Depth: 450 mm	Height: 90.5 mm	Weight: 2 kgs
144 to 196 Splice enclosure:	Width: 216 mm	Depth: 450 mm	Height: 150 mm	Weight: 3 kgs

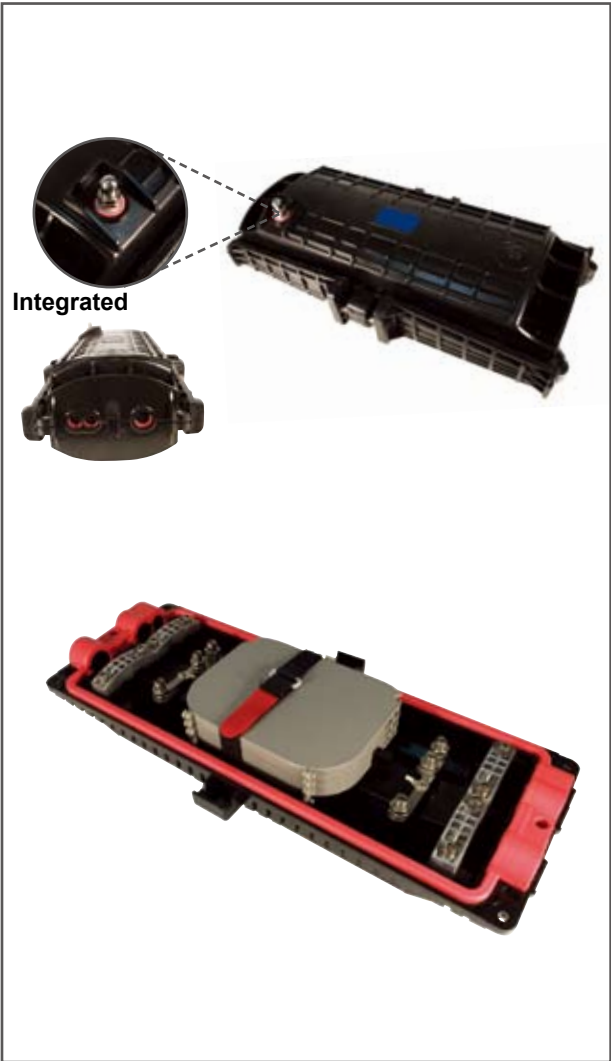

Ordering Information

Description	Part NO.
24 Splice Inline enclosure	INLINE01
48 Splice Inline enclosure	INLINE02
72 Splice Inline enclosure	INLINE03
144 Splice Inline enclosure	INLINE04
192 Splice Inline enclosure	INLINE05



+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com