

# LGX Cassette Module

V.3.0

## Description

FibreFab offer a robust case that houses LGX modules for use in LGX 3U chassis. The case allows for up to 24 splices from pigtails to incoming fibre from a cable, it also includes a hole for a cable entry and cable gland. Pre-punched strain tie locations come as standard. The interchangeable LGX modules provide a flexible solution to the user allowing a range of different adaptor types.

## Features

- Interchangeable LGX modules
- Lightweight aluminium design
- Multiple cable entry points
- Strain tie Locations
- Up to 24 splices

## Benefits

- Screw in LGX plates offer flexible solution
- Wide range of adaptor types
- Bend radius protection at all times

## Applications


- Data Centre Infrastructure
- Storage Area Network
- Fibre Channel

## Technical Specification

DESCRIPTION	
Height	30 mm
Width	107mm
Length	280mm
Net weight	270g
Packed weight	370g
Packaged dimensions	34mm (H) X 166mm (W) X 312mm (L)
IP rating	IP20
Cable Entry 13mm	1
Cable Entry 20mm	2
Material	Sheet Aluminium
Material Thickness	1.2mm
Colour	Black RAL9004
Material coating	Electro Static Powder Coating
Operating Temperature	-40°C to + 50°C
Compliant to	RoHS, Reach, SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1



## Technical Drawing

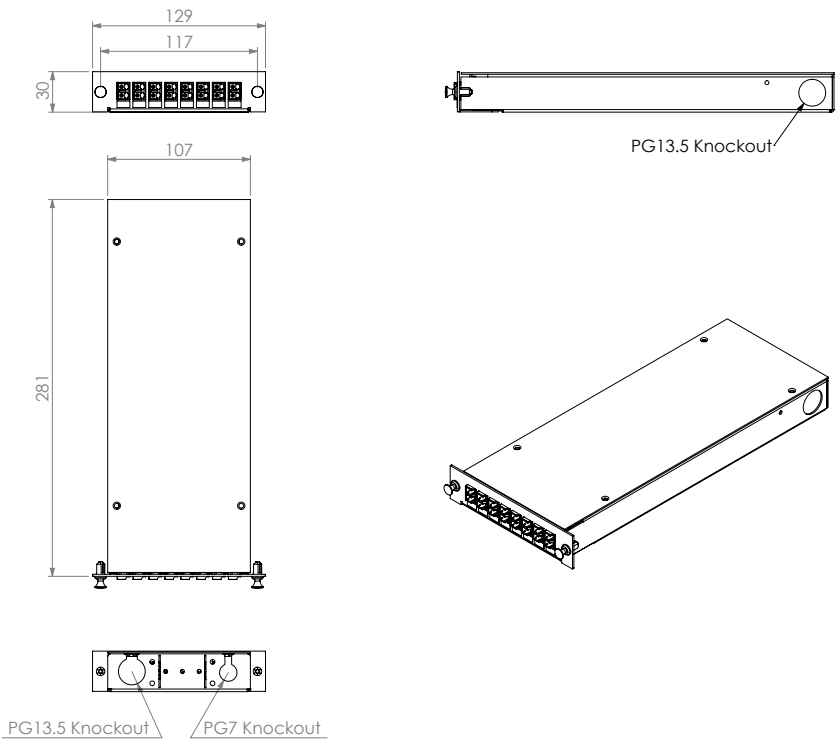

+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com




www.fibrefab.com

## LGX Cassette Module

V.3.0

### Ordering Information

### For all of your variations

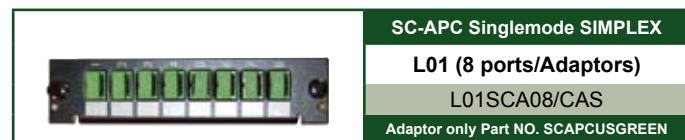

+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com