


S01 Sliding Patch Panel - ST, FC - S01STM24

The Optronics sliding tray optical fibre patch system in its basic form is supplied with the panels unloaded ready for you to install the adapter of your choice. The panel can also be pre-loaded complete with the required adapter and simple splice management kit, or supplied with pre-terminated cable to meet your project needs.



24
Port

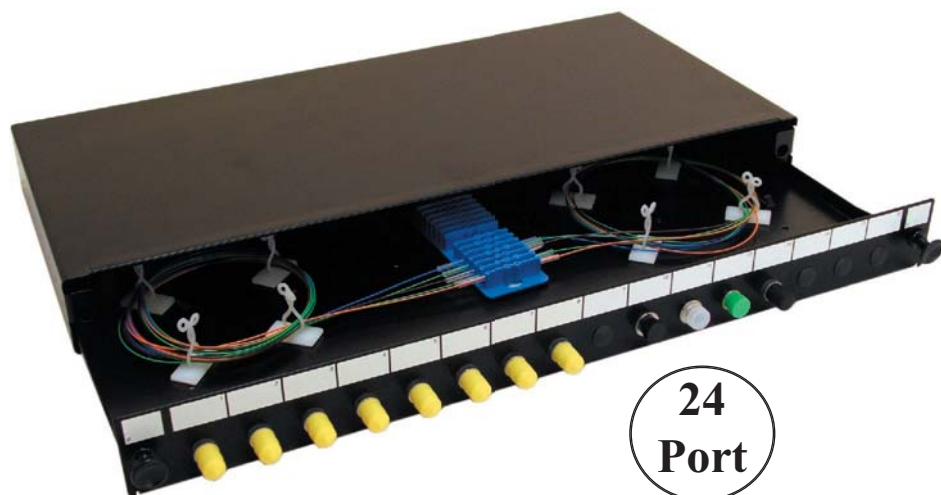

Easy panel identification labelling



Cable entry 4 x 10mm gland holes
2 x 20mm gland holes

ST Singlemode

S01 (24 port)	With
S01STS04	4 adapters
S01STS08	8 adapters
S01STS12	12 adapters
S01STS16	16 adapters
S01STS24	24 adapters

Adapter only part no. STUZR02

ST Multimode

S01 (24 port)	With
S01STM04	4 adapters
S01STM08	8 adapters
S01STM12	12 adapters
S01STM16	16 adapters
S01STM24	24 adapters

Adapter only part no. STUPHBR

FC-APC Singlemode

S01 (24 port)	With
S01FCA04	4 adapters
S01FCA08	8 adapters
S01FCA12	12 adapters
S01FCA16	16 adapters
S01FCA24	24 adapters

Adapter only part no. FCAPCUZR02-D

FC Multimode

S01 (24 port)	With
S01STM04	4 adapters
S01STM08	8 adapters
S01STM12	12 adapters
S01STM16	16 adapters
S01STM24	24 adapters

Adapter only part no. FCUPHBR-D

FC Singlemode

S01 (24 port)	With
S01FCS04	4 adapters
S01FCS08	8 adapters
S01FCS12	12 adapters
S01FCS16	16 adapters
S01FCS24	24 adapters

Adapter only part no. FCUZR02-D

Specification:

Dimensions Width: 19" - 483mm, Depth: 8" - 200mm, Height: 1u - 44mm, Weight: 2.6kg Fully loaded,
Cable entry 4 x 10mm gland holes 2 x 20mm gland holes Colour: Black (Also available in Grey RAL7035)

See Accessories for further cable management and blanking options