


# New Speedway Fibre Splice Tray For Up To 24 Fibres

V3.1





Stackable

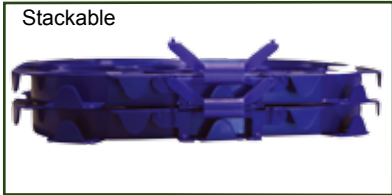

Supplied with cassette lid

Hinged style holder for heat shrink splice holder

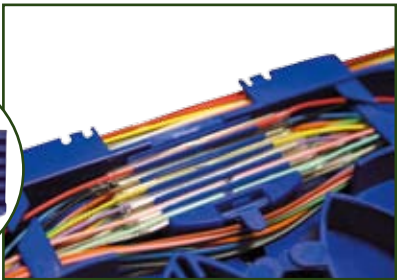

Tray hinge -  
For additional splice trays to be mounted

Storage for fibre pick

Hinged holder for crimp style splice



External Fibre Management Channels





Mounting holes for panel

Removable Fibre Pick -

Used to withdraw individual fibres



Internal Fibre Management Channels and cross over radius protection

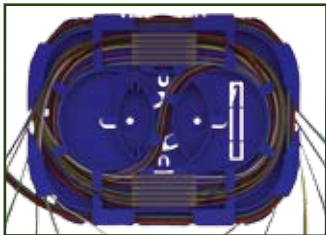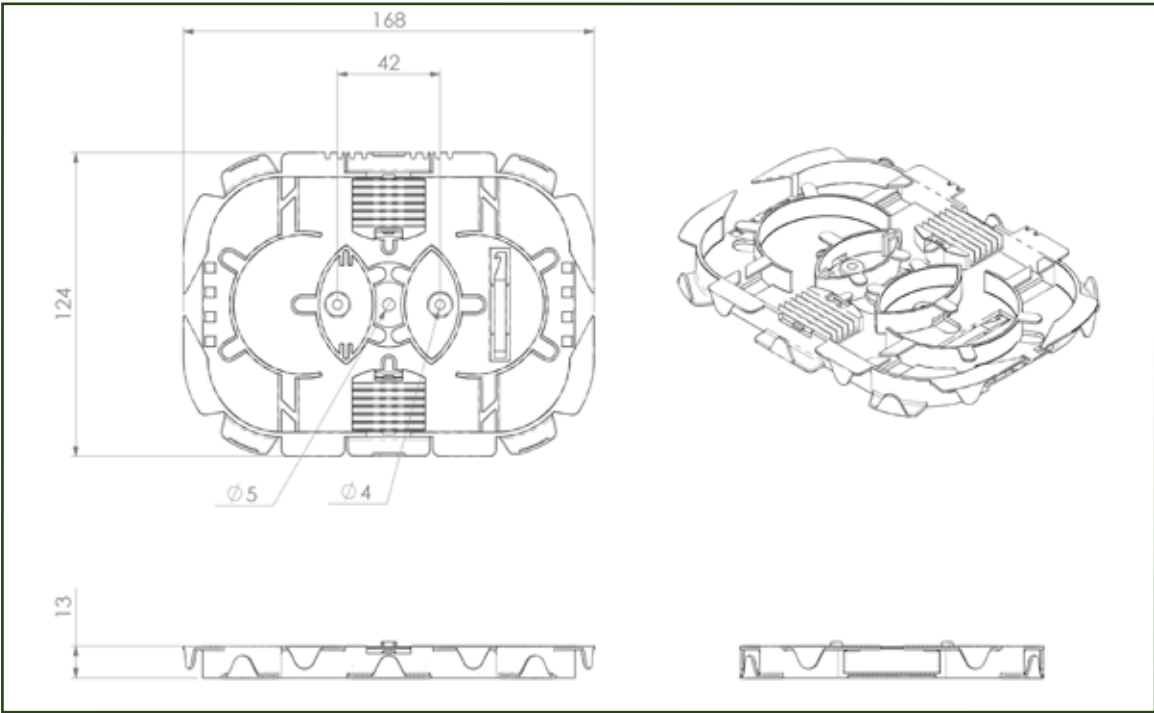

+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com

# New Speedway Fibre Splice Tray For Up To 24 Fibres

Introducing the revolutionary new FibreFab Speedway splice tray with unrivalled ease of use and flexibility. Featuring a unique external fibre pathway and pivoting splice holder arrangement this tray redefines the concept of splice management, combining fibre management and splicing control in one product. Due to its accommodating internal dimensions the Speedway splice tray is able to comfortably hold 24 splices with either heatshrink or crimp German style splice protectors with up to 900µm buffered fibres.

## Features

- Unique external fibre pathway allows easy storage of excess fibre and multi-directional routing of entry and exit fibres
- Spacious interior maintains 30mm fibre bend radius and allows storage of either 250µm or 900µm buffered fibre
- Internal management allows multiple fibre routing options including cross over
- Pivoting splice holders allow uninterrupted control of fibre prior to splicing and during rework
- Built in fibre pick can be used to withdraw individual fibres and can be stored in the tray after use
- Will hold up to 24 splices with either heatshrink or crimp style splice protectors
- Supplied with tray hinge to maintain access to splices with stacked trays
- Transparent clip in lid supplied with every tray
- Cable tie points to secure fibre on entry and exit
- Mountable via central hole, DIN style holes or double sided foam adhesive pad

## Applications

- Fibre management
- Internal and external
- Wall boxes
- Patch panels

## Technical Specification

ELEMENT	VALUE
Width	168mm
Depth	124mm
Height	13mm
Net weight	81g
Material	ABS
Colour	Blue
Operating temperature	-40°C to +50°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC

## Ordering Information

DESCRIPTION	PART NO.
Speedway Fibre Splice Tray Heat Shrink	<b>SPT01</b>
Speedway Fibre Splice Tray Crimp German Style	<b>SPT02</b>

Design Registration Number 001274211



+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com