


# W01 - Double Door Wall Box

V.3.2

## Description

The wall box system in its basic form is supplied with the box unloaded ready for you to install the adaptor of your choice. The box can also be pre-loaded complete with the required adaptor or pre-loaded with pigtails to meet your project needs. The quality of construction that comes with the FibreFab range of wallboxes ensures a safe, secure and aesthetically pleasing wallbox for your network.

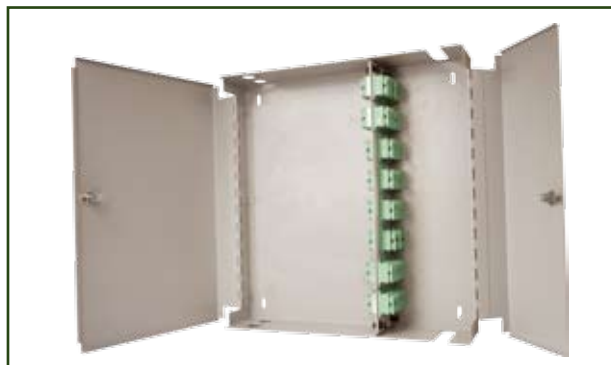


## Features/Benefits

- ▶ Available in single and double door models
- ▶ Double door models include two separate locks for security
- ▶ Internal bend radius protection included
- ▶ Cable entry and exit points can be knocked out to suit installation

## Applications

- ▶ Internal application
- ▶ Data Centre or telecommunications networks
- ▶ For use in multi dwelling units or demarcation points within a network

## Technical Drawing

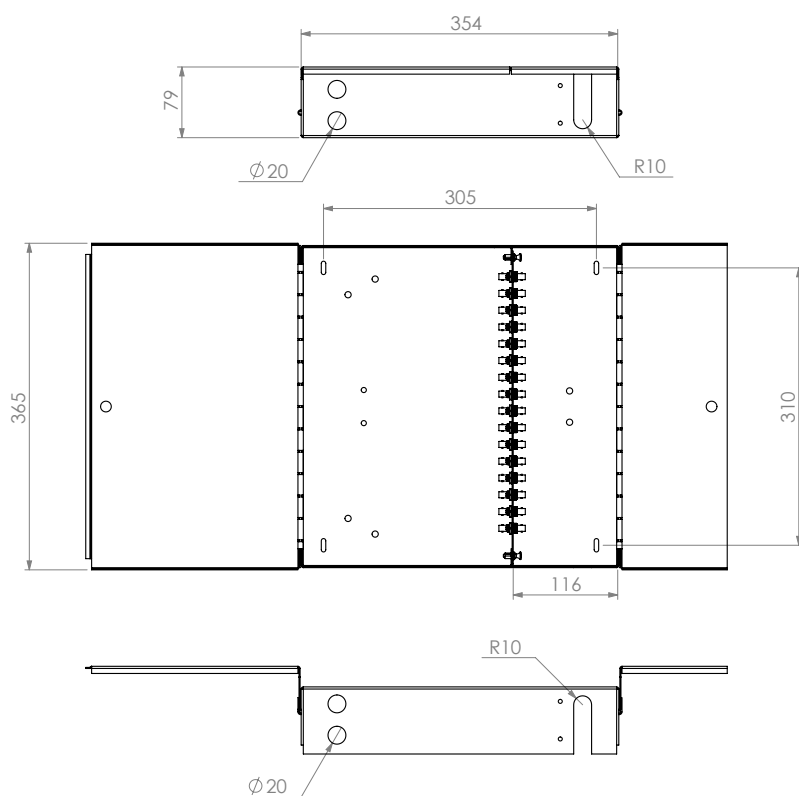

All dimensions in mm



+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com

# W01 - Double Door Wall Box

## Technical Specification

Lockable Wall Box	Double Door
Height	360mm
Width	360mm
Depth	85mm
Net Weight	3.2kg
Packaged Weight	3.5kg
Package Dimensions	375mm (W) X 375mm (L) X 90mm (D)
IP Rating	IP20
Suitable for adaptor type	SC Duplex
Number of doors	2
Cable entry 20mm	4
Material	Cold Rolled Steel
Material thickness	1.2mm
Material coating	Electro Static Powder Coating
Colour	Grey RAL 7035
Operating Temperature	-40°C to + 50°C
Compliant to	RoHS, Reach, SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1

## Part Number Generator

