FibreFab

Lockable Slimline Wall Box - W28

V.3.1

Description

The FibreFab wall box system can be supplied unloaded ready for the installer to load with their choice of adaptors, or pre-loaded with adaptors and pigtails ready for installation. With the ability to use a full array of adaptor types, this wall box offers a flexible solution to the end user, enabling them to incorporate a multi functional wall mounted box which allows easy access during installation or rework with no disturbance of existing cable or fibres. In addition to the array of adaptors the box also offers multiple cable entry and exit solutions: up to 4 standard entry points for loose tube, tight buffered, preterminated, steel tape armoured cable and 2 slotted positions for patch cord exit.


Features/Benefits

- ▶ Up to 24 fibre
- Multiple adaptor options
- RoHS, REACH, SVHC
- Lockable single door
- Internal bend radius protection included
- For use in multi dwelling units or demarcation points
- Includes fibre management spool (as standard)
- Splice Tray
- Strength tie point
- Optional extras: pigtails / adaptors

Technical Specification

Slimline Wall Box	
Height	288mm
Width	300mm
Depth	54mm
Net Weight	3.3kg
Packaged Weight	3.5kg
Package Dimensions	310mm x 300mm x 65mm
IP Rating	IP20
Suitable for adaptor type	SC Duplex
Number of doors	1
Cable entry 20mm	4
Material	Cold Rolled Steel
Material thickness	1.2mm
Material coating	Electro Static Powder Coating
Colour	Grey (RAL7035)
Operating Temperature	-40°c to + 50°c
Compliant to	RoHS, Reach, SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1



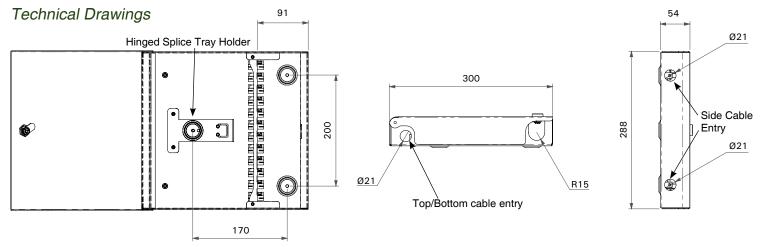

+44 (0) 870 127 3331










W28 - 12 Position SC Duplex up to 24 fibres

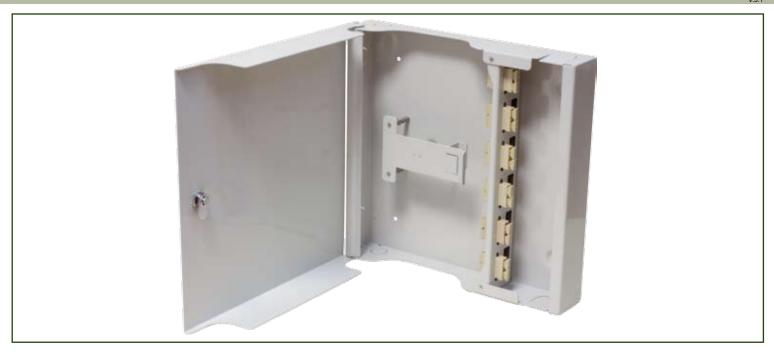

Includes







Splice Tray



Spool x 4



Gland



Strength Tie

Part Number Generator

