


Data sheet

ID	HWADW 120 HFT
Description	outlet box, single gang, draughtproof, halogen-free
Properties	drilled hole size required Ø 121 mm, box rim diameter Ø 126 mm, for partition board thickness from 7 to 35 mm, 5 conduit entries Ø 20 mm, 4 conduit entries Ø 25 mm and 16 cable entries
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating
Usage	for dry lining installations
Classification	400 V, IP 30, H

halogenfrei according to DIN VDE 0604
halogenfree according to EN 50642
halogenfree according to EN 60754

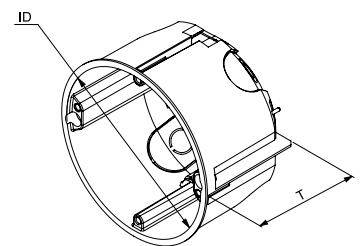

Halogen free

True

Degree of protection (IP)

IP30

Art. no.	Dimensions Ø/LxB x T	Cover model	Small Package	Large Package
103 863	Ø 120 x 65 mm	none	5 pc	50 pc
105 308	Ø 120 x 65 mm	with cover lid	5 pc	40 pc
105 309	Ø 120 x 65 mm	with wallpaper lid	5 pc	40 pc

Further technical details

Details	
break-out opening	False
seal membrane	True
nozzle	False
step membrane	False
Mounting switching equipment	
Luminaire hook mounting	False
Nozzle	None
With nail lugs	False
Circuit integrity	None

Details	
Model	Single
Shape	Round
Mounting method	Hollow wall
With screws	True
Provided with revolving ring	
Connectable	
Equipped with	None
Cover attachment	Screwed
Material	PP/TPE