


### ON-EIC-FJJHNMT C5e Inline Coupler, FTP, Jack To Jack Type

---

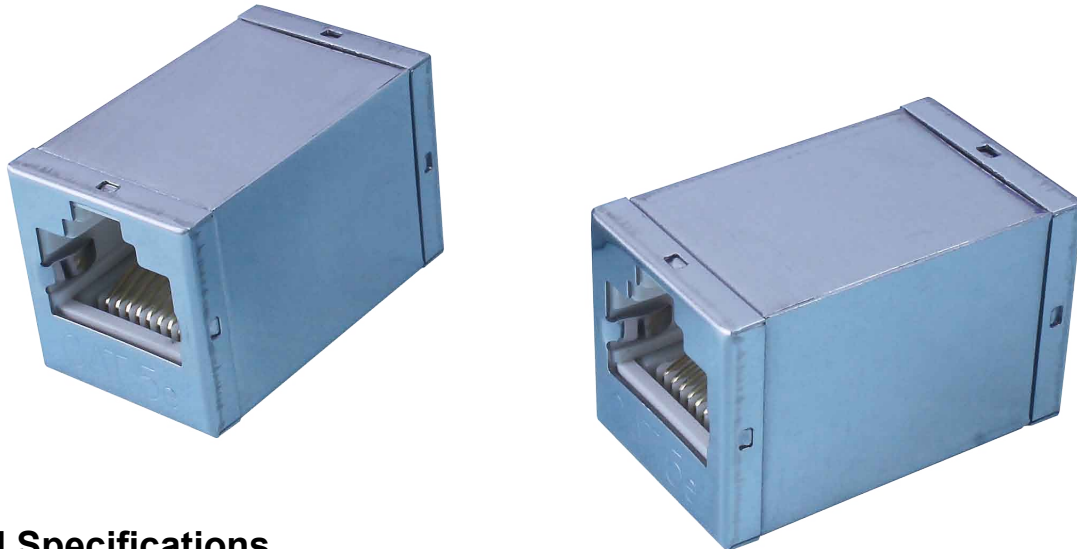

#### Electrical Specifications

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps.
- DC Resistance : 0.1 ohms (max.)
- Withstanding Voltage : 100 VAC RMS @ 60Hz / 1 min.

#### Mechanical Specifications

- Jack Insertion Cycle : Over 2000 Cycles (min.)
- Operation Temperature : -40°C ~ +70°C

#### Performance

Meets C5e EIA/TIA 568B Standard

#### Materials

---

Body	Fireproof ABS UL-94V0
Metallic Case	Metal
Jack	8P8C 50 micro inches gold plated
PCB	FR-4 / UL-94V0

---