


IC: XX0019

TYPE: ОКЛ-5-Д(0,5)П-5*1,5

A-DQ2Y 5×1,5 max.60 fibers

Application: this cable is suitable for blowing into tube 12/10, or 14/10

Construction

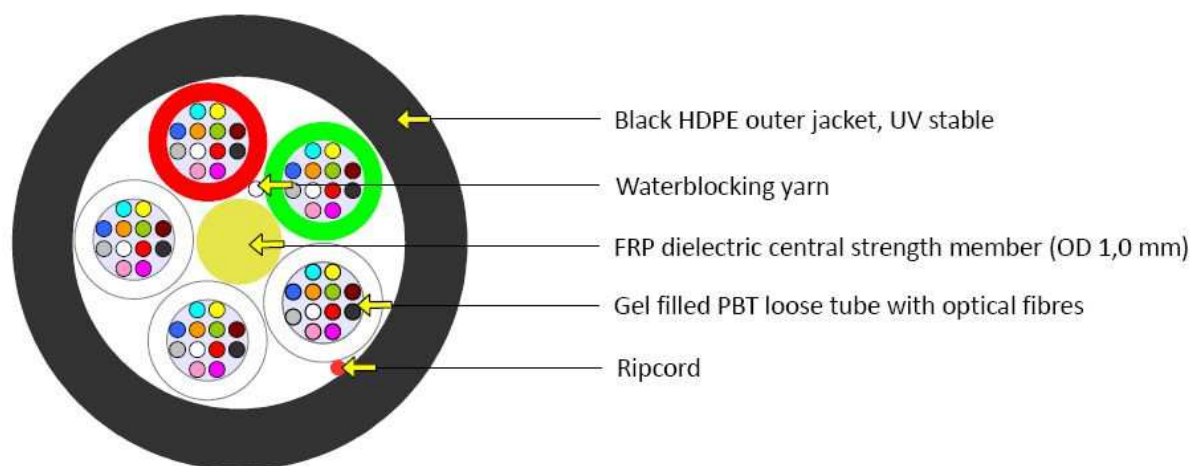

Fiber color coding	
According to IEC 60304	
1 Red	7 Brown
2 Green	8 Violet
3 Blue	9 Turquoise
4 Yellow	10 Black
5 White	11 Orange
6 Grey	12 Pink

Order example	
2000 A-DQ2Y 5×1,5 12 (1x12)E9/125 BLK jacket color, identification code: XX0019	
Packaging	
Plywood reel	
Standard put-up length	
Up to 4000 m	

Sheat Marking	
Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

IES reserves the right to change the values in this document without prior notice. This document is property of company IES. This document or any of its parts are not allowed to be redistributed without written consent of company IES.

Mechanical and Environmental properties

Optical	
Type of fiber optic	
Single mode fiber 9/125	
Multi mode fiber 50/125	
Multi mode fiber 62,5/125	
Test	Value
Cable outer diameter	6.520 mm $\pm$ 0.300
Cable weight	26.828 kg/km
Fiber Reinforced Plastic diameter	1.4 mm
Loose tube diameter	1,8 mm
Short tern	500 N
Impact resistance test	3 Number of. impact
Min. bend radius (no load)	120
Min. bend radius (load)	160
Operating temperature, °C	-40°C - +60°C
Storage temperature, °C	-40°C - +60°C
Installation temperature, °C	-10°C - +60°C
Cable life time- minimum 30 years	

IES reserves the right to change the values in this document without prior notice. This document is property of company IES. This document or any of its parts are not allowed to be redistributed without written consent of company IES.