


IC: 68R00T

TYPE: OKЛ-5-Д(1,0)П-6*1,5

A-DQ2Y 6x1,5 max.72 fibers

Application: this cable is suitable for air-blowing installation

Construction

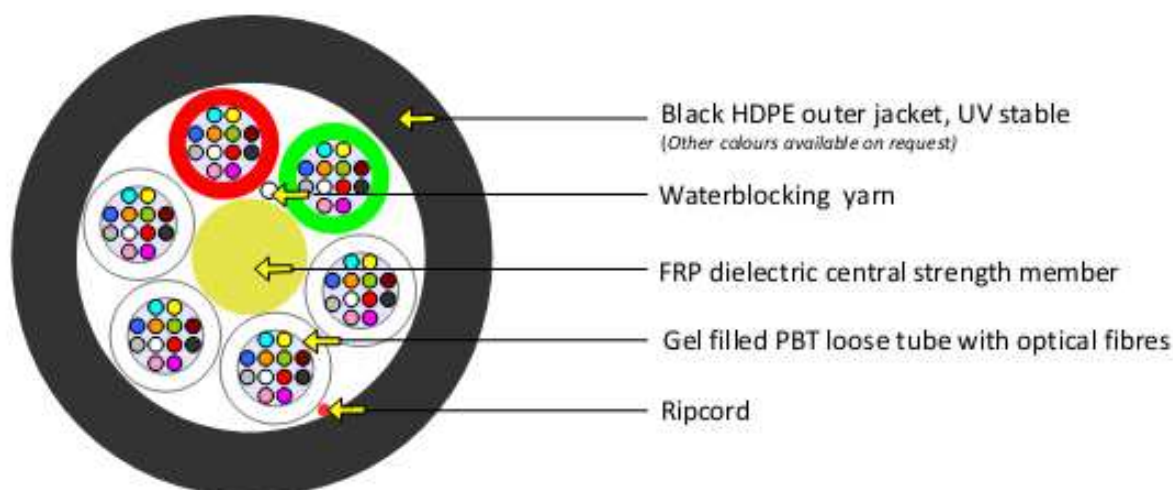

Fiber color coding	
According to IEC 60304	
1 Red	7 Brown
2 Green	8 Violet
3 Blue	9 Turquoise
4 Yellow	10 Black
5 White	11 Orange
6 Grey	12 Pink

Order example
2000 m A-DQ2Y 72F (6x12) G657A1 BLK jacket colour, identification code: 68R00T
Packaging
Wooden drum
Standart put-up length
2000 m

Sheat Marking	
Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

IES reserves the right to change the values in this document without prior notice. This document is property of company IES. This document or any of its parts are not allowed to be redistributed without written consent of company IES.

Mechanical and Environmental properties

Optical	
Type of fiber optic	
SMF ITU-T G.657.A (AllWave-Flex)	
SMF ITU-T G.657.B3 (AllWave-Flex)	
SMF ITU-T G.655 C&D (TrueWave RS)	
SMF ITU-T G.655.C&E G.656 (TrueWave Reach)	
SMF ITU-T G.652.D - (LWP)	
SMF ITU-T G.652.D (AllWave)	
Test	Value
Cable outer diameter	6.920mm ± 0.300
Cable weight	35.242 kg/km
Loose tube diameter	2,5 mm
Outer jacket thickness	0.5 mm
Fiber reinforced plastic diameter	1.8 mm
Short tern	1000 N
Impact resistance test	3 Number of. impact
Min. bend radius (no load)	120
Min. bend radius (load)	160
Operating temperature, °C	-40°C - +60°C
Storage temperature, °C	-40°C - +60°C
Installation temperature, °C	-10°C - +60°C
Cable life time- minimum 30 years	

IES reserves the right to change the values in this document without prior notice. This document is property of company IES. This document or any of its parts are not allowed to be redistributed without written consent of company IES.