


IC: XX3037

TYPE: ОКВс-А(0,4)Пнг-НФ-8722008-2

**J/A-VQ(ZN)H 1F**

**Application:** this cable is suitable for outdoor use.

### Construction

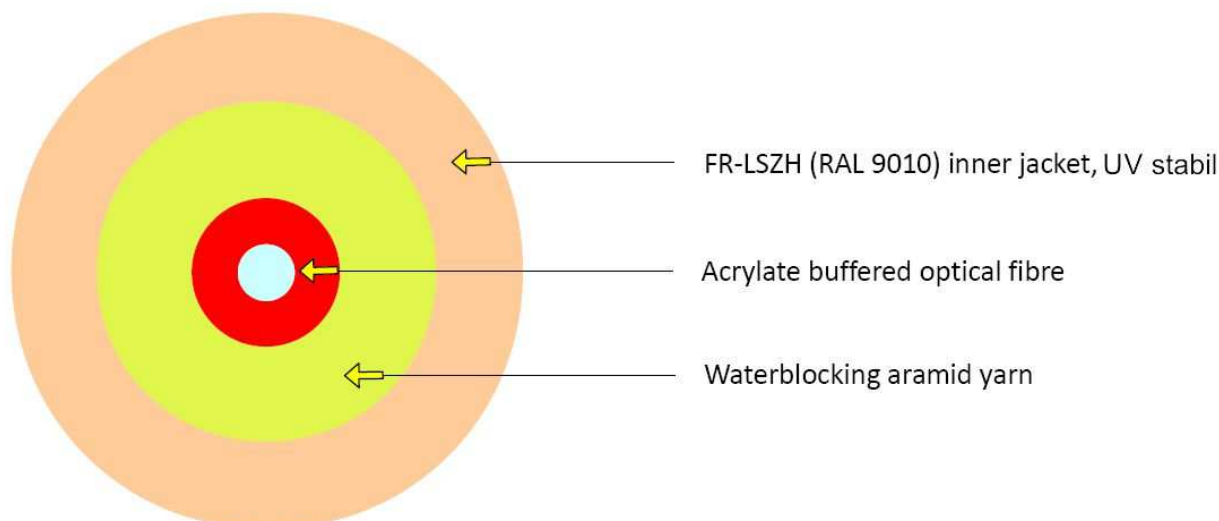

Fiber color coding
According to IEC 60304
1 Red

Order example
2000 J/A-VQ(ZN)H 1E9/125G.657A, WH jacket color, identification code: XX3037
Packaging
Drum or plywood
Standart put-up length
2000 m

Sheat Marking	
Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

IES reserves the right to change the values in this document without prior notice. This document is property of company IES. This document or any of its parts are not allowed to be redistributed without written consent of company IES.

83104 Bratislava, Nová Rožňavská 136

E-mail: [ies@ies.sk](mailto:ies@ies.sk)

[www.ies.sk](http://www.ies.sk)

### Mechanical and Environmental properties

Optical	
Type of fiber optic Single mode fiber 9/125 (ITU-T G.657A )	
Test	Value
Cable outer diameter	3.500 mm ± 0.100
Cable weight	13.124 kg/km
Max. tensile strength	400 N
Impact resistance test	3 Number of. impact
Min. bend radius (no load)	60
Min. bend radius (load)	80
Operating temperature, °C	-20°C - +70°C
Storage temperature, °C	-10°C - +60°C
Installation temperature, °C	0°C - +60°C
Cable life time- minimum 30 years	

IES reserves the right to change the values in this document without prior notice. This document is property of company IES. This document or any of its parts are not allowed to be redistributed without written consent of company IES.