




BCA




	E _{max} mm	P _{ap} Nm	H mm	GC	
				REF.	kg/ud
BCA 41X41	20	17,5	90	2/8809	0,39
BCA 41X82	20	17,5	130	2/8810	0,42

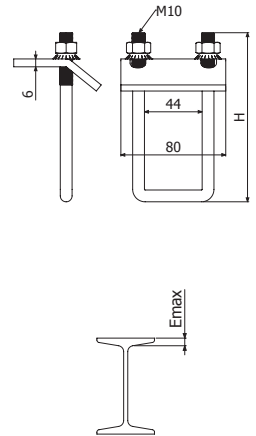

CSJ



	AL		GS		i430	
	REF.	kg/m	REF.	kg/ud	REF.	kg/m
CSJ	2/3461	0,04	2/4291	0,11	2/3462	0,10



BVL




BVL41




BVL82

	H mm	GC	
		REF.	kg/ud
BVL41	60	2/11230	0,50
BVL82	100	2/11231	0,63

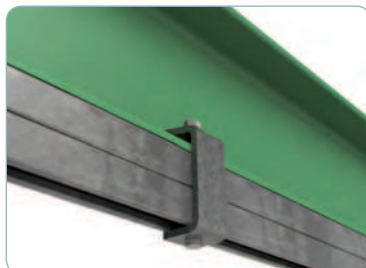

BVL41 + 41X41

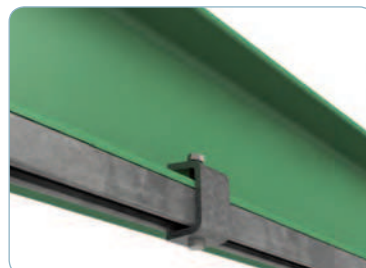

BVL82 + 41X82

