


Data sheet

ID	HFSM LG
Description	slip type coupler, halogen free
Properties	for the connection of conduits, suitable for rigid and pliable conduits
Colour	light grey, similar to RAL 7035



Norms: EN 61386-1, EN 61386-21
halogenfree according to EN 60754

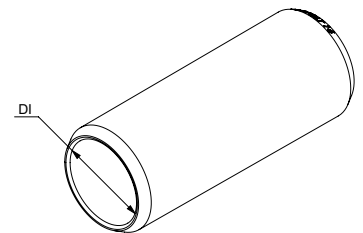

Working temperature
-25 to +90 °C

UV-Level*
L2

Art. no.	For tube diameter	ps	pl
041 017	20 mm	100 pc	800 pc
041 421	16 mm	100 pc	1200 pc
041 422	25 mm	50 pc	600 pc
041 423	32 mm	25 pc	300 pc
041 424	40 mm	25 pc	200 pc
041 425	50 mm	15 pc	120 pc
041 426	63 mm	8 pc	64 pc

Further technical details

Details	
Halogen free	True
Model	Plug-in
Material	PC-Blend

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.