

# Air Blown Unit


ID: **Z238**



KABELOVNA Děčín Podmokly s.r.o.  
Ústecká 840/33, 405 33 Děčín 5  
Czech Republic  
DIČ CZ26759993  
tel.: +420 412 706 222  
www.kabelovna.cz

16.7.2015 ver.6

## Air Blown Unit 3,2mm max. 24F

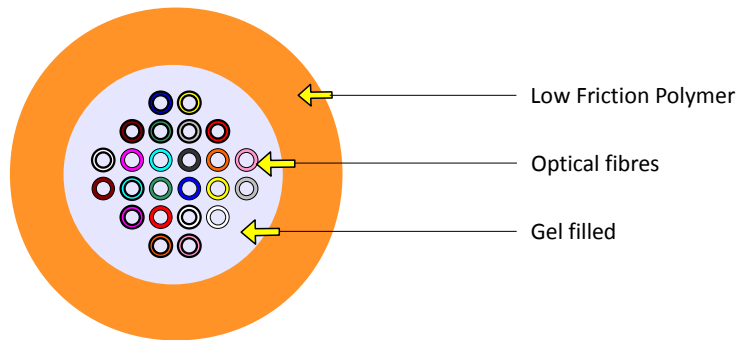

### Order example

2100 m Air Blown Unit 24E9/125G.657.A1 jacket colour ORG, cable specification Z238

### Fibre colour coding

According to IEC 60304

1 Red	7 Brown	13 Red*	19 Brown*
2 Green	8 Violet	14 Green*	20 Violet*
3 Blue	9 Turquoise	15 Blue*	21 Turquoise*
4 Yellow	10 Black	16 Yellow*	22 Black*
5 White	11 Orange	17 White*	23 Orange*
6 Grey	12 Pink	18 Grey*	24 Pink*

\*with black rings

Other fibre colour sequences available on request

### Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

### Packaging Standard put-up length Drum size

Plywood	2100 m $\pm$ 5 %, other lengths on request	450×300×390
---------	--	-------------

### Fibre Type

Single mode fiber 9/125  
Multi mode fiber 50/125  
Multi mode fiber 62,5/125

See the Fibre Specification sheet

# Air Blown Unit

ID: **Z238**



KABELOVNA Děčín Podmokly s.r.o.  
 Ústecká 840/33, 405 33 Děčín 5  
 Czech Republic  
 DIČ CZ26759993  
 tel.: +420 412 706 222  
 www.kabelovna.cz

16.7.2015 ver.6

## Air Blown Unit 3,2mm max. 24F

### Mechanical and Environmental properties

Test	Value	Unit	Method	Comment
Cable outer diameter	3,2 ± 0,1	mm	EN 60811-1-1	
Cable weight	10	kg/km		- calculated
Outer jacket thickness	0,6	mm		
Coefficient of friction	0,12			
Max. tensile strength	70	N	EN 60794-1-2-E1	- max. attenuation variation ≤ 0,1 dB at 1550 nm - no increase attenuation after the test
Crush resistance test	100	N	EN 60794-1-2-E3	- plate dimensions 100×100 mm - max. attenuation variation ≤ 0,05 dB at 1550 nm - duration of loading 1 min. - no increase attenuation after the test
Impact resistance test	3	Nm	EN 60794-1-2-E4	- 3 Impact - no fibre cracking - max. attenuation variation ≤ 0,05 dB at 1550 nm - no increase attenuation after the test
Min. bend radius (no load)	10	× OD	EN 60974-1-2-E11a	- max. attenuation variation ≤ 0,05 dB at 1550 nm - no increase attenuation after the test
Min. bend radius (load)	15	× OD	EN 60974-1-2-E11b	- max. attenuation variation ≤ 0,05 dB at 1550 nm - no increase attenuation after the test
Moisture resistance test	pass		EN 60794-1-22-F5	- water height 1 m - sample length 3 m - no leakage on free sample end - duration of test 24h
Temperature range	Installation Operation Storage	-5 to +50°C -20 to +70°C -20 to +70°C	EN 60794-1-22-F1	- max. attenuation variation ≤ 0,1 dB at 1550 nm - Dwell time acc. to EN 60794-1-22-F1 - When installing or assembly under temperature below 5°C cable has to be stock in temp of 20°C at least 24h before installation. - no increase attenuation after the test

Cable life time - minimum 30 years

