

# Data Sheet

Product Name: **10054BLH and accessories**

Description: cable trunking, halogen-free, 2m;

Colour: white, similar to RAL 9010

Fire behaviour: non-flame propagating

Applicable standard: IEC 60754, EN 50085



## Cable Trunkings:

material	impact strength	temperature range	UV-stable
PC-ABS	2J	-25 °C / +60 °C	L1

## Accessories

material	impact strength	temperature range	UV-stable			
ABS	20J	-15 °C / +90 °C	L1			
external angle*	internal angle*	flat angle	flat tee	connector	stop end	divider
<b>AE10054B</b>	<b>AI10054B</b>	<b>AP10054B</b>	<b>GT10054B</b>	<b>GU10054B</b>	<b>TT10054B</b>	<b>S10040LH</b>


\* angle variable

## Package Quantities:

product	small package [m]	large package [m]
10054BLH	12	720

product	small package [pcs]	large package [pcs]
AE10054B	6	144
AI10054B	6	-
AP10054B	8	-
GT10054B	6	180
GU10054B	20	1500
TT10054B	12	648
S10040LH	35	-

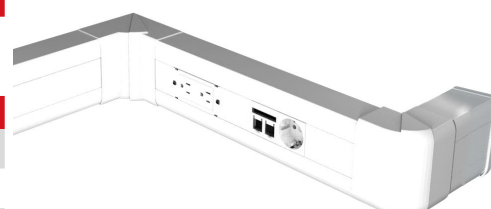

Example of use: 100x54 trunking mosaic system