


Ruggedized Fiber Patch Cords

APPLICATION

Ruggedized Fiber Patch Cords include an additional outer jacket for extra protection and are used for interconnect or cross-connect fiber networks within structured cabling systems. They are ideal for data centers, Broadband CATV, Passive Optical Network PON, WDM or DWDM multiplexing, FTTH, and voice services in ATM and SONET metropolitan and access networks. These cords are made to order and available with duplex connector combinations, custom lengths, standard loss, ultra-low loss, and in custom colors. Contact customer service for details.

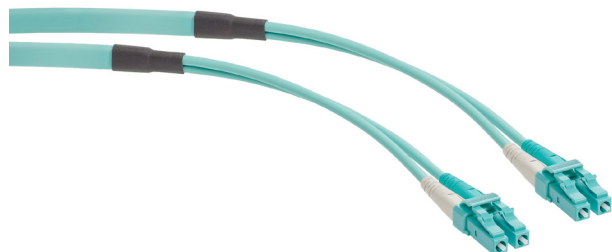

SPECIFICATION

Patch cords shall be compliant with ANSI/TIA-568.3-D. Standard insertion loss shall be a maximum of 0.25 dB for multimode and single-mode. Low loss shall be a maximum of 0.15 dB for multimode and single-mode with ultra-low loss a maximum of 0.10 dB for multimode LC and SC connectors. Multimode return loss shall be greater than 26 dB and greater than 50 dB for single UPC mode connectors. Single-mode angled physical contact connectors (APC) shall have a minimum of 60 dB return loss. Patch cords shall have a pull force of at least 50 N per IEC 61300-2-4. Connector durability of greater than 500 matings for both multimode and single-mode. Patch cords shall be LSZH (Low Smoke Zero Halogen) rated. Patch cords shall be individually packaged with part numbers, descriptions, optical performance, code 39 barcode part number printed on each package, and QR code to access supporting documentation. Patch cords shall include wrap labels including length, end designation, and serial number, providing traceability to factory collected test data.

FEATURES

- Available in simplex, duplex, and pigtail configurations
- LC, LC/APC, SC, SC/APC, ST, FC, and FC/APC connector options
- Stock and Make-to-Order
- TIA compliant color-coded connectors and boots
- Cable jacket and boots color-coded for easy ID of fiber
- Fiber options: OS2, OM1, OM3, and OM4
- 100% tested for insertion loss, and single-mode for return loss
- Patch cords include a Limited Lifetime Warranty when used with other Leviton cabling and installed by a Leviton certified contractor
- Other jacket colors available as custom with MOQ and lead time applicable
- Custom configurations via [Levitonemea.com/mtc](https://www.levitonemea.com/mtc)

DESIGN CONSIDERATIONS

- Standard polarity is A-B
- LSZH (Low Smoke Zero Halogen) rated
- Single-mode UPC and APC polish
- FC and ST connectors have metal bodies
- Duplex clips included with duplex configurations
- Bend-insensitive glass (OS2, OM3, and OM4)

STANDARDS & REGULATIONS

- ANSI/TIA-568.3-D
- ISO/IEC 11801-1
- ANSI/TIA-598-D
- Fiber Optic Connector Interchangeability Standards (FOCIS)
 - TIA-604-10B (LC)
 - TIA-604-3B (SC)
 - TIA-604-2B (ST)
 - TIA-604-4B (FC)
- End face geometry:
 - IEC 61755-3-1 (UPC/PC)
 - IEC 61755-3-2 (APC)
- Fiber compliance:
 - OS2: IEC 60793-2-50, ITU-T G.657.A1
 - OM1: IEC 60793-2-10
 - OM3: IEC 60793-2-10, ITU-T G.651.1
 - OM4: IEC 60793-2-10, ITU-T G.651.1
- Jacket flame rating:
 - LSZH / HFFR-LS
 - IEC 60332-3-24, IEC 60332-1-2
- RoHS

PRODUCT SPECIFICATIONS
Ruggedized Fiber Patch Cords



COUNTRY OF ORIGIN

CHINA

WARRANTY INFORMATION


For a copy of product warranties, visit www.leviton.com/warranty

PHYSICAL SPECIFICATIONS


Connector Durability > 500 Matings
 Connector Cable Retention 50 N (11.24 lbf)

Ruggedized Fiber Patch Cords

FIBER PERFORMANCE									
Cable Type	Fiber Count	Nominal Diameter (mm)	Weight (kg/km)	Tension (N)		Bend radius (mm)		Temperature Range (C°)	
				Installation	Long Term	Installation	Long Term	Operational	Storage
2.8 mm Ruggedized Duplex	2	4.0 x 7.0	28 kg/km	180	90	56 mm	28 mm	-20°C to +60°C	-20°C to +70°C

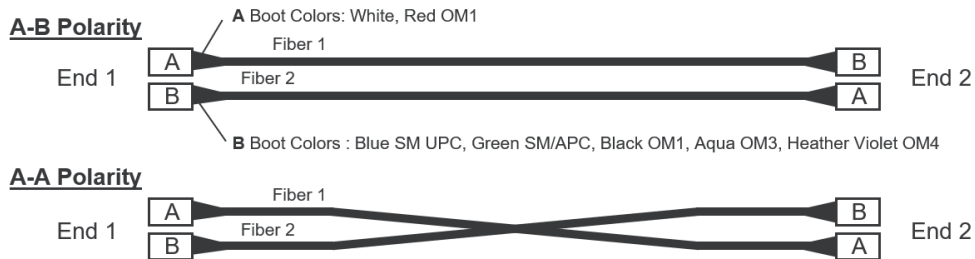

Cord Cross Section

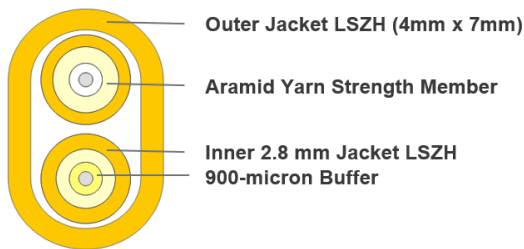

PRODUCT SPECIFICATIONS
Ruggedized Fiber Patch Cords



Ruggedized Fiber Patch Cords

OPTICAL SPECIFICATIONS						
Connector Family	Insertion Loss: Standard Performance		Insertion Loss: Low Loss & Ultra Low Loss		Return Loss	
	Multimode	Single-mode	Multimode	Single-mode	Multimode	Single-mode (UPC/APC)
LC	≤ 0.25 dB	≤ 0.25 dB	≤ 0.10 dB *	≤ 0.15 dB	≥ 26 dB	≥ 50 dB / ≥ 60 dB
SC	≤ 0.25 dB	≤ 0.25 dB	≤ 0.10 dB *	≤ 0.15 dB	≥ 26 dB	≥ 50 dB / ≥ 60 dB
ST	≤ 0.25 dB	≤ 0.25 dB	≤ 0.15 dB	≤ 0.15 dB	≥ 26 dB	≥ 50 dB / ≥ 60 dB
FC	≤ 0.25 dB	≤ 0.25 dB	≤ 0.15 dB	≤ 0.15 dB	≥ 26 dB	≥ 50 dB / ≥ 60 dB

* Ultra Low Loss available in multimode LC and SC connectors only.

PERFORMANCE SPECIFICATIONS

FIBER PERFORMANCE											
Fiber Type	Maximum Attenuation (dB/km)				Bandwidth (MHz*km)		Transmission Distance (meters)				
	850 nm	1300 nm	1310 nm	1550 nm	850 nm	1300 nm	100 Mb	1 GbE	10 GbE	40 GbE	100 GbE
8.2/125 μm Single-mode (OS2)	N/A	N/A	0.4	0.3	N/A	N/A	>5,000 @ 1310 nm		>10,000 @ 1310 nm	N/A	N/A
62.5/125 μm MM (OM1)	3.5	3.5	N/A	N/A	200	500	300/300 @ 850/1300 nm	300/600 @ 850/1300 nm	36/300 @ 850/1300 nm	N/A	N/A
50/125 μm LO (10G-300m) MM (OM3)	3.0	3.0	N/A	N/A	2,000*	500**		1,000/600 @ 850/1300 nm	300/300 @ 850/1300 nm	100 @ 850 nm	100 @ 850 nm
50/125 μm LO (10G-550m) MM (OM4)	3.0	3.0	N/A	N/A	4,700*	500**		1,040/600 @ 850/1300 nm	550/300 @ 850/1300 nm	150 @ 850 nm	150 @ 850 nm

*The effective modal bandwidth is determined based on an overfill launch (OFL) per ANSI/TIA-455-204, except on laser-optimized fiber types.

** 10GbE transmission @ 1,300 nm only applies to 10GBASE-LX4 (CWDM).

PRODUCT SPECIFICATIONS
Ruggedized Fiber Patch Cords



Ruggedized Fiber Patch Cords

Make-to-order!		Ruggedized Fiber Patch Cord Options				
AAA-	BBB	CC	DD	EE	FFFF	-YYY
PRODUCT TYPE	FIBER TYPE	CABLE TYPE	CONNECTOR (1ST END)	CONNECTOR (2ND END)	LENGTH (m)*	CUSTOMIZATION
<ul style="list-style-type: none"> VPC = STANDARD FIBER PATCH CORD LPC = LOW LOSS FIBER PATCH CORD 	<ul style="list-style-type: none"> S2 = OS2 YELLOW M1 = OM1 ORANGE M3 = OM3 AQUA M4 = OM4 H-VIOLET 	<ul style="list-style-type: none"> G1 = 2.8MM RUG-DUP 	<ul style="list-style-type: none"> LC = LC/UPC L9 = LC/9APC AL = LC/APC SC = SC/UPC AC = SC/APC C9 = SC/9APC ST = ST/UPC FC = FC/UPC AF = FC/APC 	<ul style="list-style-type: none"> LC = LC/UPC L9 = LC/9APC AL = LC/APC SC = SC/UPC AC = SC/APC C9 = SC/9APC ST = ST/UPC FC = FC/UPC AF = FC/APC XX = PTAIL 	<ul style="list-style-type: none"> 0005 = 000.5 meters 0015 = 001.5 meters 0150 = 015.0 meters 	Colors** <ul style="list-style-type: none"> 01 = BLUE 02 = ORANGE 03 = GREEN 04 = BROWN 05 = SLATE 06 = WHITE 07 = RED 08 = BLACK 09 = YELLOW 10 = VIOLET 11 = ROSE 12 = AQUA Polarity <ul style="list-style-type: none"> A = A-A

For assistance customizing your patch cords, please visit levitonemea.com/mto or call Tech Support +44 (0) 1592 778494.

Notes:

- *Length ≤ 30 metres are configurable in .2/.4/.5/.6/.8 metre increments
- ** Patch cords with custom colors have a 1-km minimum order quantity

For further support information, visit leviton.com/ns/support

NETWORK SOLUTIONS GLOBAL HEADQUARTERS
 Bothell, WA, USA | leviton.com/ns
 (800) 824 3005 / +1 (425) 486 2222 | appeng@leviton.com

NETWORK SOLUTIONS EUROPEAN HEADQUARTERS
 Glenrothes, UK | leviton.com/ns/emea
 +44 (0) 1592 772124 | customerserviceeu@leviton.com

Leviton is dedicated to designing, developing and manufacturing sustainable high-performance structured cabling and speciality cabling solutions. Network Solutions products are available worldwide in over 100 countries. Visit us online to learn more.