

GOCN

Central Loose Tube Cables
Outdoor – Corrugated Steel Tape Armor (CST)
A-DQ(ZN)(SR)2Y
 Full Rodent Protection
 05-07-2017 v7.0

Ordering Information

Belden European Part Numbers

Fibre Description / count	2	4	6	8	12	16	24
62.5/125-OM1	GOCN102	GOCN104	GOCN106	GOCN108	GOCN112	GOCN116	GOCN124
50/125-OM2 BI	GOCN202	GOCN204	GOCN206	GOCN208	GOCN212	GOCN216	GOCN224
50/125-OM3 BI	GOCND02	GOCND04	GOCND06	GOCND08	GOCND12	GOCND16	GOCND24
50/125-OM4 BI	GOCNE02	GOCNE04	GOCNE06	GOCNE08	GOCNE12	GOCNE16	GOCNE24
9/125 ITU G.655 C&D	GOCN702	GOCN704	GOCN706	GOCN708	GOCN712	GOCN716	GOCN724
9/125 ITU G.652D & G.657A1	GOCN802	GOCN804	GOCN806	GOCN808	GOCN812	GOCN816	GOCN824
9/125 ITU G.657A2 BI	GOCNF02	GOCNF04	GOCNF06	GOCNF08	GOCNF12	GOCNF16	GOCNF24
9/125 ITU G.657B3 BI	GOCNI02	GOCNI04	GOCNI06	GOCNI08	GOCNI12	GOCNI16	GOCNI24
Std. plywood reel (non-returnable)	Ø 1250 * 688 mm 93 kg						
Std. delivery length	2100 ± 105m						


Applications

- For **outdoor** use in structured (data) wiring systems such as **industrial backbone**, campus backbone, building backbone (riser) and/or horizontal cabling..
- For **outdoor** use in networks for **industrial**, telecom, cable TV and/or broadcast.
- Suitable for **direct burial**. Easy to install in ducts, tunnels and trenches.

Features & Benefits

- A simple cable construction and consequently **more cost-effective up to 24 fibres** than multi-tube cables.
- **High mechanical and full rodent protection** provided by corrugated steel tape (**CST**) armour.
- **Predicted lifetime > 30 years.**

Construction & Dimensions

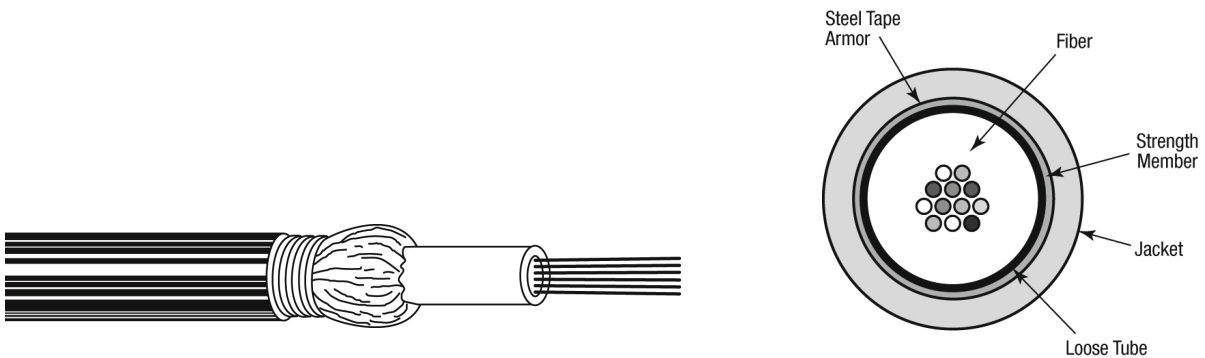

Cable Specifications (construction in accordance with IEC 60794)

1. Primary coated optical fibres: $\varnothing 250 \pm 15 \text{ um}$.
2. Central tube, jelly filled (**non-dripping and silicon-free**) with **up to 24 fibres**.
Individually colour coded optical fibres:
1 – 12: red – natural – yellow – blue – green – violet – brown – black – orange – turquoise – pink and white.
13 – 24: red – natural – yellow – blue – green – violet – brown – grey – orange – turquoise – pink and white with rings.
3. Water Swellable glass yarns as strength members and for the **longitudinal watertightness**, surrounded by swelling tape.
4. Corrugated Steel Tape Armouring (CST): helical longitudinally applied steel tape (0.155 mm).
5. Black UV resistant PE outer jacket.
Identification: BELDEN OFC – “cable type” – number x type of fibre + date-, meter- and P/N marking.

Mechanical Data

No. of fibres	Max. 24
\varnothing Central tube (mm)	3.3
nom./max. (mm)	9.0/9.3
Energy of flame (kJ/m)	1774
Weight (kg/km)	80

Optical Characteristics

Characteristics Single-Mode – Matched-Cladded optical fibres according to ITU.

European P/N Coding, Position 5	Fibre-Type	Mode-Field /Cladding Diameter (um)	Wave-length (nm)	Attenuation ^B typical/ max. (dB/km)	Dispersion (ps/(nm-km))	PMD ^A (ps/km)	Cable Cut-off Wave-length (nm)
7	9/125 G.655 C&D	8.4 ± 0.6 125 ± 0.7	1550 1625	0.2 / 0.22 0.21 / 0.24	≤ 4.5 ≤ 7.9	≤ 0.04	≤ 1260
8	9/125 G.652D & G.657A1 BI OS2	9.2 ± 0.4 125 ± 0.7	1310 1550 1625	0.33 / 0.34 0.18 / 0.19 0.20 / 0.24	≤ 3.2 ≤ 17	≤ 0.06	≤ 1260
F	9/125 G.657A2 BI	8.9 ± 0.4 124.8 ± 0.3	1310 1550 1625	0.34 / 0.35 0.19 / 0.21 0.20 / 0.24	≤ 3.5 ≤ 18	≤ 0.2	≤ 1260
I	9/125 G.657B3 BI	8.8 ± 0.4 125 ± 0.4	1310 1550 1625	0.34 / 0.35 0.19 / 0.21 0.20 / 0.23	≤ 3.5 ≤ 18	≤ 0.06	≤ 1260

Note A- Link design value

Note B- Due to cabling the optical attenuation values can increase with max. 0.05 dB/km

Characteristics Multi-Mode Graded-Index optical fibres according to IEC 60793

European P/N Coding, Position 5	Fibre-Type	Core/ Cladding Diameter (um)	Wave-length (nm)	Attenuation ^C typical/ max. (dB/km)	Bandwidth (MHz•km)	Ethernet Performance (m)		Num. Apert. (µm)
						1 GBE	10 GBE	
1	62.5/125 OM1	62.5 ± 2.5 125 ± 1	850 1300	2.7 / 3.0 0.7 / 0.8	≥ 200 ≥ 600	220 550	33 300	0.275 ± 0.015
2	50/125 OM2 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 500 ≥ 500	600 600	83 300	0.20 ± 0.015
D	50/125 OM3 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 1500 ≥ 500	1000 550	300 300	0.20 ± 0.015
E	50/125 OM4 BI	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.5 0.5 / 0.6	≥ 3500 ≥ 500	1100 550	550 300	0.20 ± 0.015

Note C- Due to cabling the optical attenuation values can increase with max. 0.4 dB/km

Macro Bending Performance Fibers

Maximum attenuation increase for Bend Insensitive Single Mode fibers in dB depending on turns and radius.

European P/N Coding, Position 5	Fibre-Type	Wave-length (nm)	Turns 100 Radius 30 mm (dB)	Turns 10 Radius 15 mm (dB)	Turn 1 Radius 16 mm (dB)	Turn 1 Radius 10 mm (dB)	Turn 1 Radius 7.5 mm (dB)	Turn 1 Radius 5 mm (dB)
7	9/125 G.655 C & D	1550 1625	0.05 0.05		0.5 0.5			
8	9/125 G.652D & G.657A1 BI OS2	1550 1625	0.03 0.03	0.25 1.0		0.75 1.5		
F	9/125 G.657A2 BI	1550 1625		0.03 0.1		0.1 0.2	0.5 1.0	
I	9/125 G.657B3 BI	1550 1625				0.03 0.1	0.08 0.25	0.15 0.45

Maximum attenuation increase for Bend Insensitive Multi Mode fibers in dB depending on turns and radius.

European P/N Coding, Position 5	Fibre-Type	Wave-length (nm)	Turns 100 Radius 37.5 mm (dB)	Turns 2 Radius 15 mm (dB)	Turns 2 Radius 7.5 mm (dB)
1	62.5/125 OM1	850 1300	0.5 0.5		
2	50/125 OM2 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5
D	50/125 OM3 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5
E	50/125 OM4 BI	850 1300	0.5 0.5	0.1 0.3	0.2 0.5

Mechanical, Physical and/or Environmental Characteristics

Description:	Tested according to:	Requirement:	According to Family specification:
Storage Temperature Range	IEC 60794-1-22-F1	-30 to +70 °C	IEC 60794-3-10
Installation Temperature Range		-5 to +50 °C	
Operating Temperature Range		-30 to +70 °C	
Bending Radius Tube (Installation and Operation)		> 25 mm	
Cable Water Blocking	IEC 60794-1-22-F5	Pass	
Cable Min. Bend Radius Operation (Long Term)	IEC 60794-1-21-E11	20 x Cable Diam.	IEC 60794-3-10
Cable Min. Bend Radius Installation (Short Term)	IEC 60794-1-21-E6	20 x Cable Diam.	
Cable Max. Tensile Strength Operation (Long Term)	IEC 60794-1-21-E1	740 N	IEC 60794-3-10
Cable Max. Tensile Strength Installation (Short Term)		2220 N	
Cable Max. Crush Resistance Operation (Long Term)	IEC 60794-1-21-E3	11 kN/m	IEC 60794-3-10
Cable Max. Crush Resistance Installation (Short Term)		22 kN/m	

Safety

	Testing standard
Toxicity	NF X 70-100-2

Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Options

- Cables for outdoor use only.
- **Non-standard cable constructions**, colours, details and/or additional information regarding specifications are available on request.