


# Data sheet

ID	<b>SFTU 50/170 WH</b>
Description	flat tee
Properties	for Starline-trunking SLS
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating

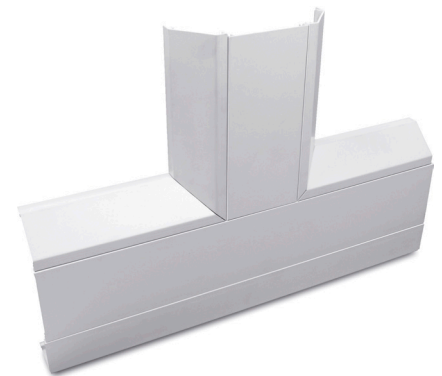

Number of covers	UV-Level
1	L2

Art. no.	Width x Depth	Branch width	Small Package	Large Package
036 781	170 x 50 mm	170 mm	5 pc	-

## Further technical details

Details	
Model	Moulded hood
Direction	Ascending
Symmetric	False
Surface protection	Untreated
Halogen free	False
Protection film	False
With duct connector	False
Mounting perforation in base	False
Mounting method covers	Spanned
With cable fixing clip	False
Material	PVC-U

\*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.